

# 190 SERIES

Light Duty Single Stage Regulators

Industrial Gas Apparatus


## 190 Series Regulators

With a lightweight, compact, and single-stage design, they are ideal for light to medium duty gas welding, cutting, and heating applications.

- Body is machined from class "A" brass
- Chrome-plated housing cap
- Internal pressure relief valve
- Sintered bronze inlet filter
- Stem-type seat assembly for more reliable seating
- 2" gauges for easy reading
- 1-1/4" diaphragm
- Weight: 2 lbs 1 oz
- UL listed



190

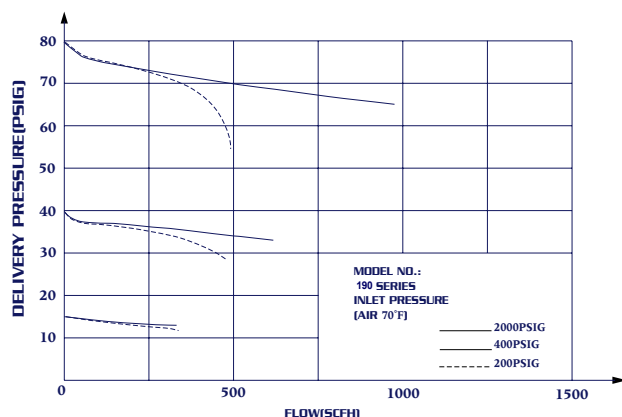

Model Number	Gas Service	Maximum Inlet Pressure (PSI)	Maximum Delivery Pressure (PSI)	Inlet Gauge	Outlet Gauge	Inlet Connection	Outlet Connection
190F-80	L.P. GAS	400	4-80	2", 400PSI	2", 100PSI	CGA510	9/16" - 18LH(M)
190X-80	OXYGEN	3000	4-80	2", 4000PSI	2", 100PSI	CGA540	9/16" - 18RH(M)
190Y-15	ACETYLENE	400	2-15	2", 4000PSI	2", 30PSI, RL	CGA510	9/16" - 18LH(M)
190Y-15-3						CGA300	
190Y-15-5						CGA520	
190IN-80	INERT GAS (Ar, He, N <sub>2</sub> )	3000	4-80	2", 4000PSI	2", 100PSI	CGA580	5/8" - 18RH(F)
190IN-175			5-175	2", 4000PSI	2", 300PSI		5/8" - 18RH(F)
190IN-175-F			5-175	2", 4000PSI	2", 300PSI		1/4" SAE FLARE
190C-175	CARBON DIOXIDE	3000	5-175	2", 4000PSI	2", 300PSI	CGA320	5/8" - 18RH(F)
190C-175-F							1/4" SAE FLARE
190H-80	HYDROGEN METHANE	3000	4-80	2", 4000PSI	2", 100PSI	CGA350	9/16" - 18LH(M)

1 psi = 0.00689 MPa = 6.895 kPa = 0.06895 bar = 0.07 kgf / cm<sup>2</sup>, 1 scfh = 0.0283 m<sup>3</sup>/h = 0.472 LPM