

## 198CD-60 Electrically Heated Flowmeter Regulator for CO<sub>2</sub>

Model 198CD-60 Electrically-Heated Flowmeter Regulator for CO<sub>2</sub> is designed for applications requiring high gas flow rates, up to 60 SCFH without freezing.

- Regulator is preset at 50 PSI
- Thermostatically-controlled built-in electric heater keeps the CO<sub>2</sub> warm and provides continuous duty cycle without freezing
- 110VAC / 190W heater is standard
- Voltage output will vary in some locations
- Please specify your voltage requirements when ordering
- Flowmeter is backpressure compensated to ensure accurate reading when line restrictions are present
- Forged brass body and housing cap
- Sintered bronze inlet filter
- Weight: 4 lbs 11 oz



198CD-60


Model Number	Gas Service	Outlet Pressure Preset (PSI)	Inlet Gauge	Flowmeter (SCFH)	Inlet Connection	Outlet Connection
198CD-60	CARBON DIOXIDE	50	2", 4000PSI	60	CGA320	5/8" - 18RH(F)

CAUTION: Use this regulator only with non-siphoned standard CO<sub>2</sub> cylinders

## 199CD-60 Radiator Flowmeter Regulator for CO<sub>2</sub>

Model 199CD-60 Radiator-Type Regulator / Flowmeter for CO<sub>2</sub> is designed for applications requiring high gas flow rates, up to 60 SCFH without freezing.

- Flowmeter is backpressure compensated to ensure accurate reading when line restrictions are present
- Regulator is preset to deliver 50 PSI into the flowmeter which is calibrated to operate at 50 PSI
- Anodized aluminum body
- Sintered bronze inlet filter
- Weight: 4 lbs

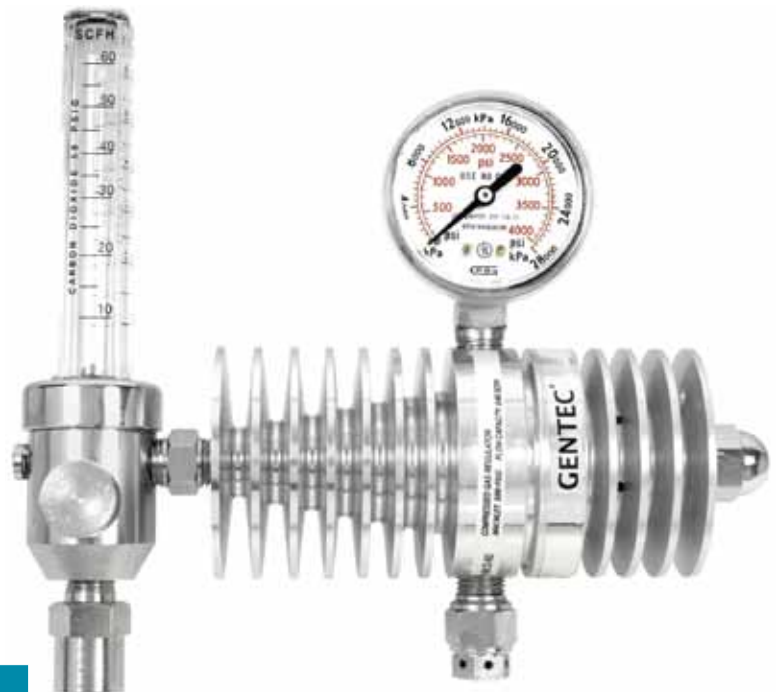

199CD-60

Model Number	Gas Service	Outlet Pressure Preset (PSI)	Inlet Gauge	Flowmeter (SCFH)	Inlet Connection	Outlet Connection
199CD-60	CARBON DIOXIDE	50	2", 4000PSI	60	CGA320	5/8" - 18RH(F)

CAUTION: Use this regulator only with non-siphoned standard CO<sub>2</sub> cylinders