

# 853LCR SERIES

Liquid Cylinder Regulators

Industrial Gas Apparatus



## 853LCR Series Single Stage Liquid Cylinder Regulators

853LCR Series Liquid Cylinder Regulators are specially designed for gaseous withdrawal from liquid cylinders of Oxygen, Carbon Dioxide and Nitrogen. Not for use on high pressure cylinders.

- Vapor side application on liquid cylinders or vessels
- 0-125 PSI delivery pressure
- 500 PSI maximum inlet pressure
- Large 2-3/4" stainless steel diaphragm
- 500 PSI external pressure relief valve on high pressure side
- Forged brass body and housing cap
- Delrin cap bushing for smooth pressure adjustment
- Stem-type seat assembly for more reliable performance
- Sintered bronze inlet filter
- 2-1/2" dual scale outlet gauge
- Conforms to CGA E-4 Standard for Gas Pressure Regulators



853LCR

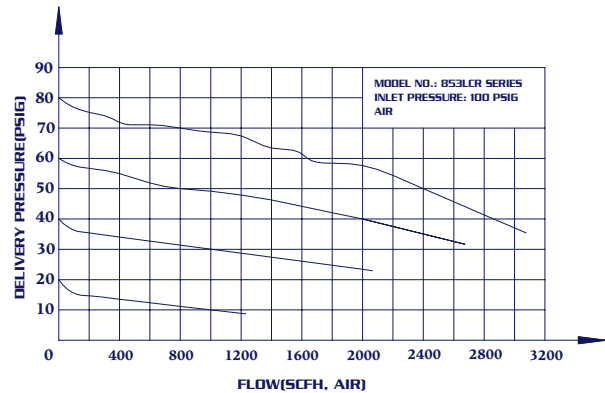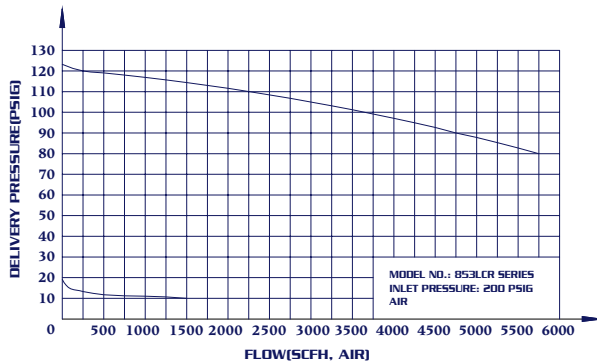

Model Number	Gas Service	Maximum Inlet Pressure (PSI)	Maximum Delivery Pressure (PSI)	Inlet Gauge	Outlet Gauge	Inlet Connection	Outlet Connection
853LCRX-125	OXYGEN	500	5-125	NONE	2-1/2", 200PSI	CGA540	9-16" - 18RH(M)
853LCRIN-125	NITROGEN	500	5-125	NONE	2-1/2", 200PSI	CGA580	5/8" - 18RH(F)
853LCRCD-125	CARBON DIOXIDE	500	5-125	NONE	2-1/2", 200PSI	CGA320	5/8" - 18RH(F)

1 psi = 0.00689 MPa = 6.895 kPa = 0.06895 bar = 0.07 kgf / cm<sup>2</sup>, 1 scfh = 0.0283 m<sup>3</sup>/h = 0.472 LPM