

P621TS-DIP

| Materials | | | | |
|---|--------------------|--|--|--|
| Valves | Stainless Steel | | | |
| | with PCTFE Seat, | | | |
| | Diaphragm Type | | | |
| Relief Valve | Stainless Steel | | | |
| | with Viton O-Rings | | | |
| Check Valve | Stainless Steel | | | |
| | with Viton O-Rings | | | |
| Regulator | Stainless Steel | | | |
| | with PCTFE Seat, | | | |
| | Single Stage | | | |
| Gauges | Stainless Steel | | | |
| Tubing & Fittings | Stainless Steel | | | |
| Flex or Rigid Hose | Stainless Steel | | | |
| Back Plate | Aluminum Alloy | | | |
| | | | | |

GENTEC® P621T Series Panel offers a regulator, on/off process valve, and tee-purge. The panel is designed for inert gases where purging may be required. The tee-purge provides the ability to purge the panel with an inert gas before and after the cylinder exchange.

Product Features

- · Material of construction: Stainless Steel
- Regulator: Stainless Steel with PCTFE Seat, Single Stage
- Full-Turn Diaphragm Valves
- One (1V) Panel + Tee Purge
- Inlet Tee Purge designed to maintain purity in a system during cylinder change-out
- All components mounted on an 11" H x 11" W Steel Panel
- Options: EFV, ESO, EFS


Applications

- · Research Laboratories
- Manufacturing
- Power Plants


Specifications

- Inlet connection: 1/4" NPT(M)
- Outlet connection: 1/4" OD Compression Fitting, SS (GENLOK)
- Purge Inlet: 1/4" OD Compression Fitting, SS (GENLOK)
- Inlet: 3000 psig maximum
- Outlet: 250 psig maximum
- Operating Temp: -40°F to 165°F
- Leak Rate: 2x10-8 atm cc/sec He
- Cv: 0.14
- Options: ESO, EFV, EFS

Dimensions



Flow Data

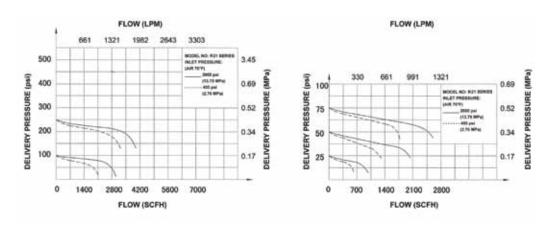

Ordering Information

| EX:P621TS- | D | 1 | P - | C580 - | S- | 11 - | ESO |
|------------|-------------------|--|--------------------------------|---|----------------------|----------------------------|--|
| Series | Inlet Pressure | Delivery Pressure | Gauge Unit | Inlet Connections | Pigtail | Purge/Outlet Connection | Options |
| • P621TS | D: 3000 psig | L: 25 psig I: 100 psig G: 250 psig | K: psig / kPa P: psig / bar | Pigtail C320: CGA320 C326: CGA326 C346: CGA346 C540: CGA540 C580: CGA580 C590: CGA590 No Pigtail 00: 1/4" NPT(M) | S: 316L T: Teflon | 11: 1/4" GENLOK | Blank: None EFV* ESO** EFS*** |

^{*}Excess Flow Valve (EFV), **Emergency Shut-off Valve (ESO), ***Excess Flow Switch (EFS)